

# DPDT 43.5GHz Failsafe / Latching

## ◆ RF Characteristics

Frequency (GHz)	Ins.loss (dB)	Isolation (dB)	VSWR	RF Power CW (W)
DC-6	0.3	70	1.3	40
6-12	0.4	70	1.4	30
12-18	0.5	60	1.5	25
18-26.5	0.7	55	1.7	12
26.5-32	0.8	50	1.8	8
32-40	0.9	50	1.9	5
40-43.5	1.0	50	2.0	4

## ◆ Operating Voltage/Coil Current

Operating Voltage(V)	12	24	28	
Coil Current (mA)	Failsafe	350	200	180
	Latching	400	200	185

\* It can be selected according to user requirements


TTL	TTL Low(V)	TTL High	
	0-0.3	3~5V	1.4mA


Indicators	Withstand Voltage V (max)	Current capacity mA (max)	Resistance Ω (max)
	50	100	15

\* Connect VDC & GND before the function operates



## ◆ Outline Drawing

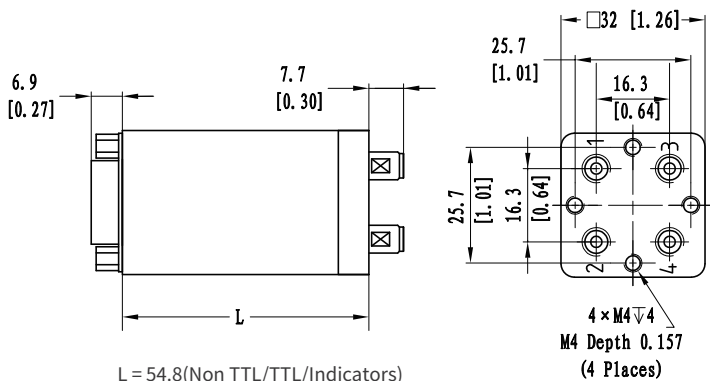

L = 54.8(Non TTL/TTL/Indicators)



Unit: mm(Inch)

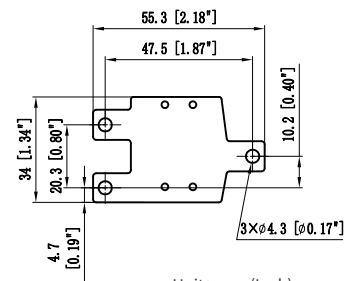

Unit: mm(Inch)

## ◆ Product Functions

- DC to 43.5GHz
- Low loss, Low VSWR, High Isolation
- 2.92 Connector
- Selectable TTL driver control

## ◆ Backplane

## ◆ Specifications

Switching Sequence: Break before Make

Switching Time: 15ms max

Storage temperature: -55°C~85°C

Operating temperature: -25°C~65°C(Standard)  
-45°C~85°C(Extended1)  
-55°C~85°C(Extended2)

Mechanical Life Cycles: 2 million cycles

RF Connectors: 2.92 Female


Impedance: 50Ω

Mechanical Shock,Non-Operating: 50G、1/2 Sine、11 ms

Vibration Operating: 20-2000 Hz、10G RMS

Actuator Terminals: D-SUB 15Pin Male

Weight: 100g



DB15 male


◆ Truth Table

Failsafe Non TTL				Failsafe TTL				
Actuator Terminals		RF Connector		Actuator Terminals		RF Connector		
D-SUB 15Pin Male				D-SUB 15Pin Male				
Pin No.	Define	No Power,RF 1-2,3-4		Pin No.	Define	No Power,RF 1-2,3-4		
1	GND	-		1	VDC	-		
2	V	RF 1-3,2-4		2	GND	-		
3~11	N/A	-		3	TTL	RF 1-3,2-4		
12	VDC	Indicators		4~12	N/A	-		
13	Ind.1			RF 1-2,3-4	13	Ind.1	RF 1-2,3-4	
14	Ind.2			RF 1-3,2-4	14	Ind.2	RF 1-3,2-4	
15	Ind.com			-	15	Ind.com	-	

Latching Non TTL				Latching TTL				
Actuator Terminals		RF Connector		Actuator Terminals		RF Connector		
D-SUB 15Pin Male				D-SUB 15Pin Male				
Pin No.	Define	-		Pin No.	Define	-		
1	V1	RF 1-2,3-4		1	VDC	-		
2	V2	RF 1-3,2-4		2	GND	-		
3	GND	-		3	TTL	RF 1-2,3-4		
4~11	N/A	-		4	TTL	RF 1-3,2-4		
12	VDC	Indicators		5~12	N/A	-		
13	Ind.1			RF 1-2,3-4	13	Ind.1	RF 1-2,3-4	
14	Ind.2			RF 1-3,2-4	14	Ind.2	RF 1-3,2-4	
15	Ind.com			-	15	Ind.com	-	

◆ Product Selection

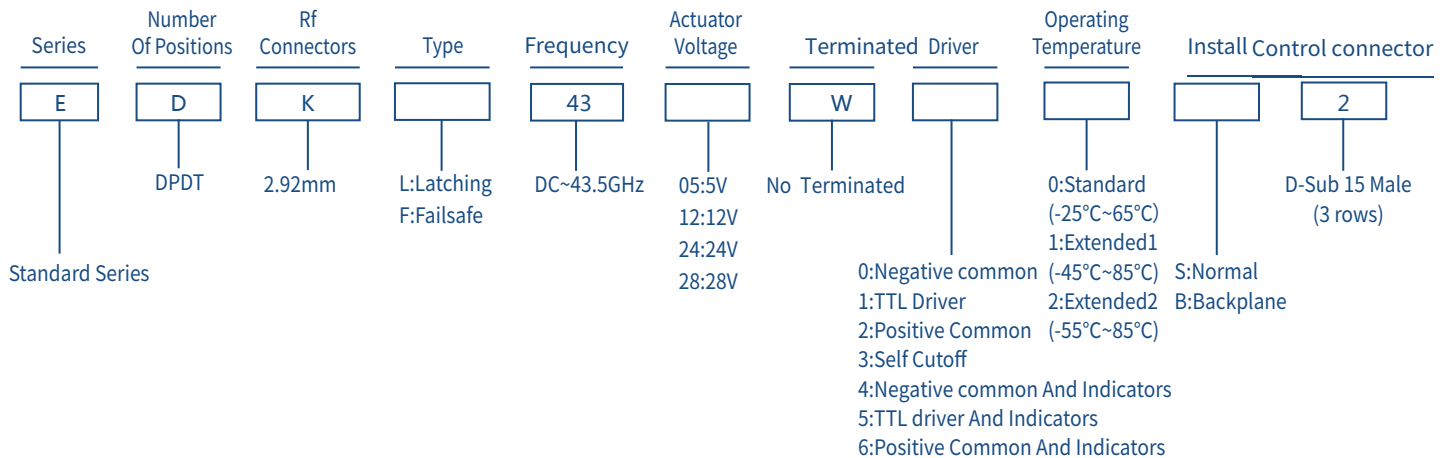

★ EXP: EDKL4305W00S2: Standard Series、DPDT、2.92mm、Latching、DC~43.5GHz、5V、Non Terminated、Negative common、Standard、Normal、D-Sub 15 Male.